


THE SHELL — REV L

LINE THE ROOMS UP YOURSELF


REV L · 22 SEP 2026 8:21 AM · TO SCALE, 11 PX PER FOOT
ANCHORED ON THE 12×24 GARAGE

Outside walls only, on a **2-foot grid**, with **every room as a to-scale tile** underneath. **Nothing taken out** — each tile carries its own fixtures. The tiles total **1,408 sf** and the shell holds **1,408 sf**, so they fit exactly; it is only the arrangement that is in question.

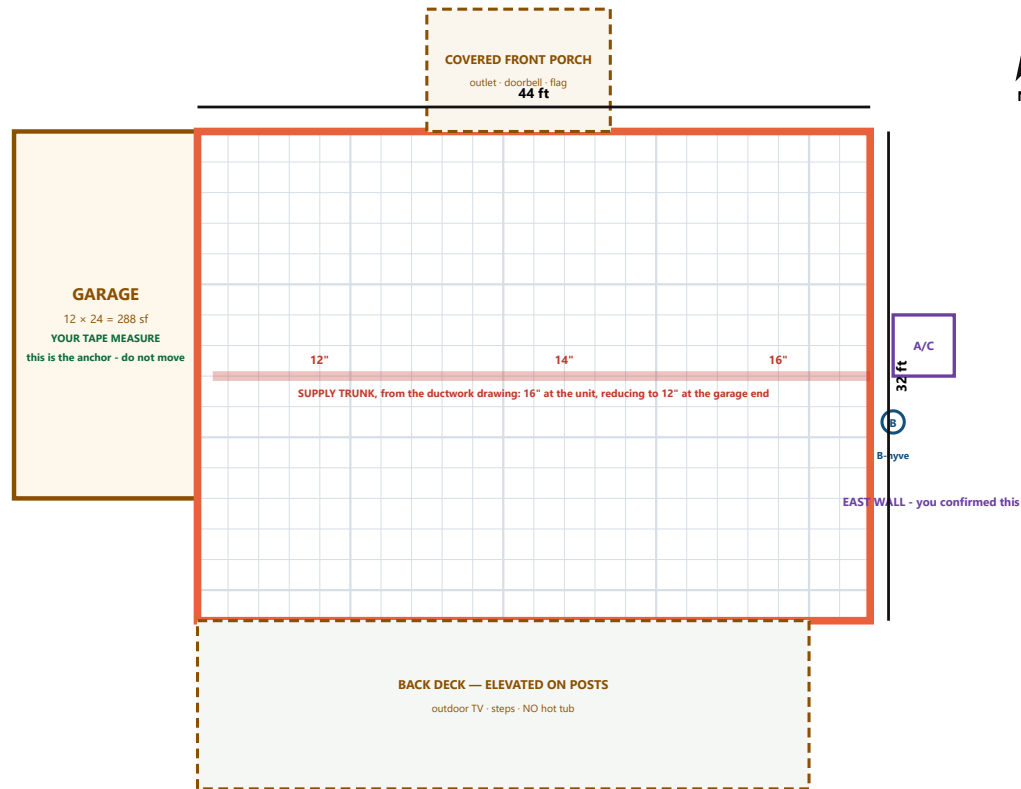

THE ROOMS — every one, to the same scale. Slide them in.

Nothing has been taken out. Each tile carries its own fixtures so none get lost in the shuffle. They total 1,408 sf and the shell holds 1,408 sf.

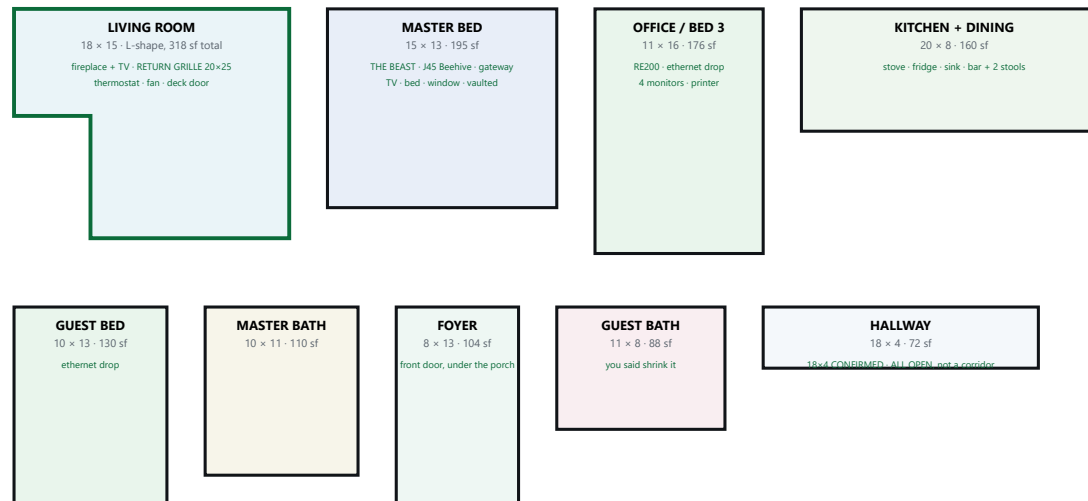

WHAT IS FIXED, AND WHAT IS YOURS TO MOVE

- **The garage, 12 × 24.** You measured it. Everything on the sheet is scaled off it — 11 pixels to the foot — so it cannot move without the whole drawing moving.
- **The A/C and the B-hyve on the east wall.** Your words: *"the Ac and everything you have on that east outside wall is correct."*
- **The covered front porch (north) and the elevated back deck (south).**
- **Everything inside the orange line is yours to rearrange.**

The ductwork drawing is now on the plan, and it is real evidence. The scope of work says the supply trunk runs **16" → 14" → 12" with reducers**, and that the new garage run taps **the side of the 12" section**. A trunk only reduces as it sheds branches, so **the 16" end is at the unit and the 12" end is at the garage** — which independently confirms the unit is **east** and the garage is **west**. That is the first time the floor plan and the HVAC bid have agreed on anything, and they were drawn from completely separate evidence.

WHAT THE DUCT SCOPE SAYS IS IN EACH ROOM

Straight off the scope of work, and it is a second independent room list:

- **Getting upgraded 6" → 8":** dining room, master bedroom, living room — the three biggest spaces, which matches the tiles.



- **Staying as-is:** master bath 6", **guest bedroom 7"**, **office 6"**, guest bath 6".
- 💡 **Guest bedroom gets a 7" and the office a 6"** — so the contractor who sized that duct treated the **guest bedroom as the larger room of the two**. My tiles have the office bigger. One of us is wrong, and it is probably me.

⚠️ **The one thing still unresolved — the two doors.**

You said the **guest bedroom and office doors are straight across from each other**. With the hallway running **east–west** they cannot be — the guest bed is on its north side and the office is off its east end, so those doors are around a corner from each other.

They face each other if the hallway's **18 ft runs north–south** instead: a **4 ft wide, 18 ft long** spine with the guest bed on one side and the office on the other. **Same two numbers, turned 90°**. Slide the hallway tile either way on this sheet and it will tell you immediately.

⚠️ **SOMETHING I FOUND IN THE DUCT DOCUMENT WHILE I WAS IN THERE**

The scope still calculates the return at **995 CFM** in two places ("**16" runs about 713 ft/min at 995 CFM**"), but the

AHRI rating is 950. I removed the standalone "airflow set to 995 CFM" line in Rev D and **missed these two**. It does not change the recommendation — 16" passes at either number — but it is a wrong figure in a document going to contractors. **Say the word and I will correct it to 950 and re-issue the PDF.**