


The west half is done and it verifies itself. Your “shower behind the washing machine” was the key — it squares the whole master suite and the column closes to two inches against the measured west wall.

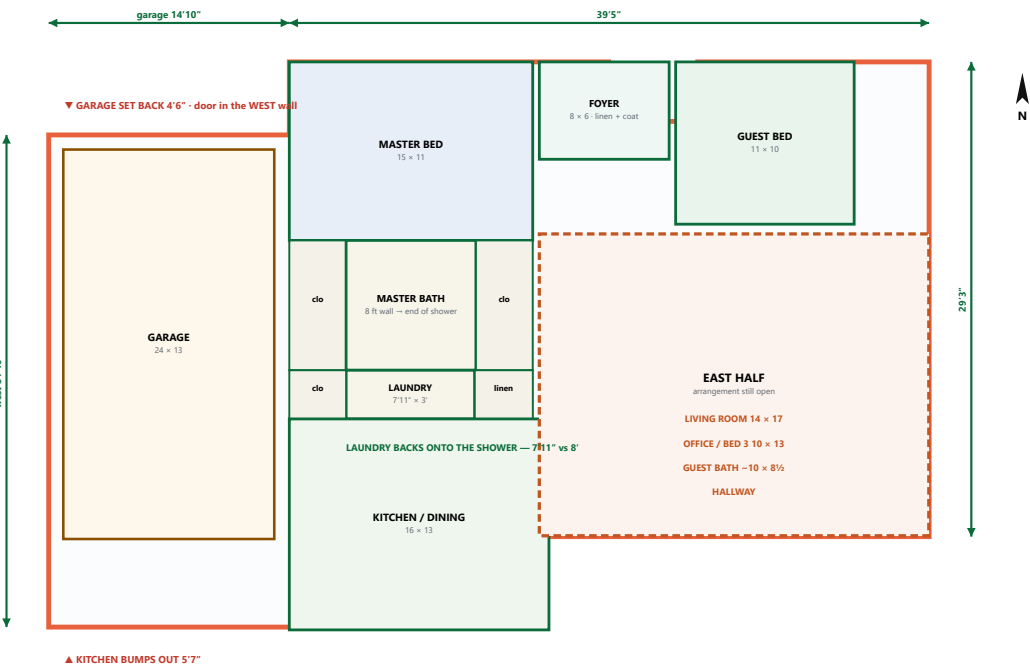

✓ THE WEST COLUMN CLOSES TO 2 INCHES. Stack what you described and it lands on the measured wall by itself — I did not force it:

master bed	11.0
master bath, wall → end of shower	8.0
laundry alcove	3.0
kitchen / dining	13.0
TOTAL	35.0
MEASURED west side	34.83 ← 2 in apart

That is an independent check, not an assumption. Four numbers you measured separately, stacked in the order you described, hitting a fifth number you measured separately.

🔑 And the widths lock too. The shower run is 8 ft; the laundry is 7'11" — one inch apart, which is what “right behind the washing machine” has to mean. Closets take the remaining 7 ft of the 15, one on each end of the shower as you said, with the linen closet beside the laundry and a coat closet in the foyer.

⚠ The east half is the whole remaining job, and it is hatched on the plan rather than guessed. Four things go in there — living room 14×17, office 10×13, guest bath ~10×8½, and the hallway — and they do not fit the way I had them:

guest bed 10 + office 13 + bath 8½	= 31'6"
east side measures	29'3"
over by	2'3"

So all three cannot sit against the east wall. One of them opens off the hallway instead. Which one?

No more tape needed. Just walk the east half and tell me the order — what you pass coming out of the hallway. Then the device key and the reworked duct drawing both fall straight out of this.

